


Insulation Hangers & Adhesive


Insulation Hangers

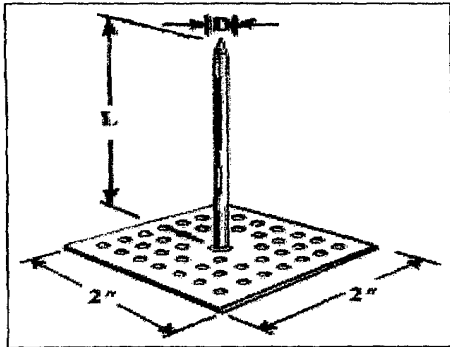

**PERFORATED BASE
(ADHESIVE REQUIRED)**

PERFORATED HANGER SPECIFICATIONS	
"D"	"L"
12 Ga. (.105)	3/4" minimum 16" maximum

- NAIL:** Low Carbon Steel, copper coated. (Aluminum and Stainless Steel nails available on special order.)
- ANNEALING:** All steel pins are fully annealed unless otherwise specified.
- BASEPLATE:** Low Carbon Steel, galvanized.

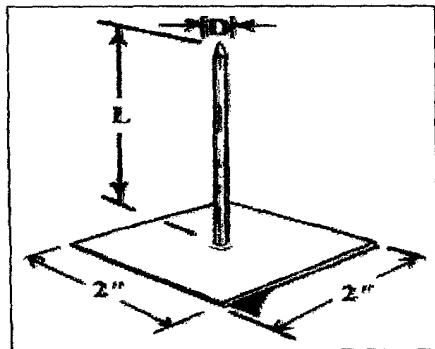

**PEEL & PRESS
(SELF-STICKING)**

PEEL & PRESS SPECIFICATIONS	
"D"	"L"
12 Ga. (.105)	3/4" minimum

- NAIL:** Low Carbon Steel, copper coated. (Aluminum and Stainless Steel nails available on special order.)
- ANNEALING:** All steel pins are fully annealed unless otherwise specified.
- BASEPLATE:** Low Carbon Steel, galvanized.

Tuff-Bond Adhesive

TUFF-BOND HANGER ADHESIVE

For bonding metal and nylon insulation hangers and similar clips to metal, concrete or masonry walls and ceilings. Service temperatures from -30° F. to 250° F.

Size	Coverage
Hanger Adhesive 1 Gallon	500-1000 Hangers
Hanger Adhesive 1 Quart	125-250 Hangers

Disclaimer: This information contained herein is believed to be accurate and correct. However, no warranty, implied or expressed, is made, regarding its accuracy or the results to be obtained from the use of this information.